


- NOTES:
- 1 ALL DIMENSIONS SHOWN ARE FINISH OPERATIONAL DIMENSIONS WHICH INCLUDE RESIDUAL COATINGS UNLESS OTHERWISE SPECIFIED.
  - 2 PART TO BE PACKED PROPERLY TO AVOID ANY DAMAGE WHILE SHIPPING & HANDLING.
  - 3 ALL HORIZONTAL DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINE UNLESS OTHERWISE SPECIFIED.

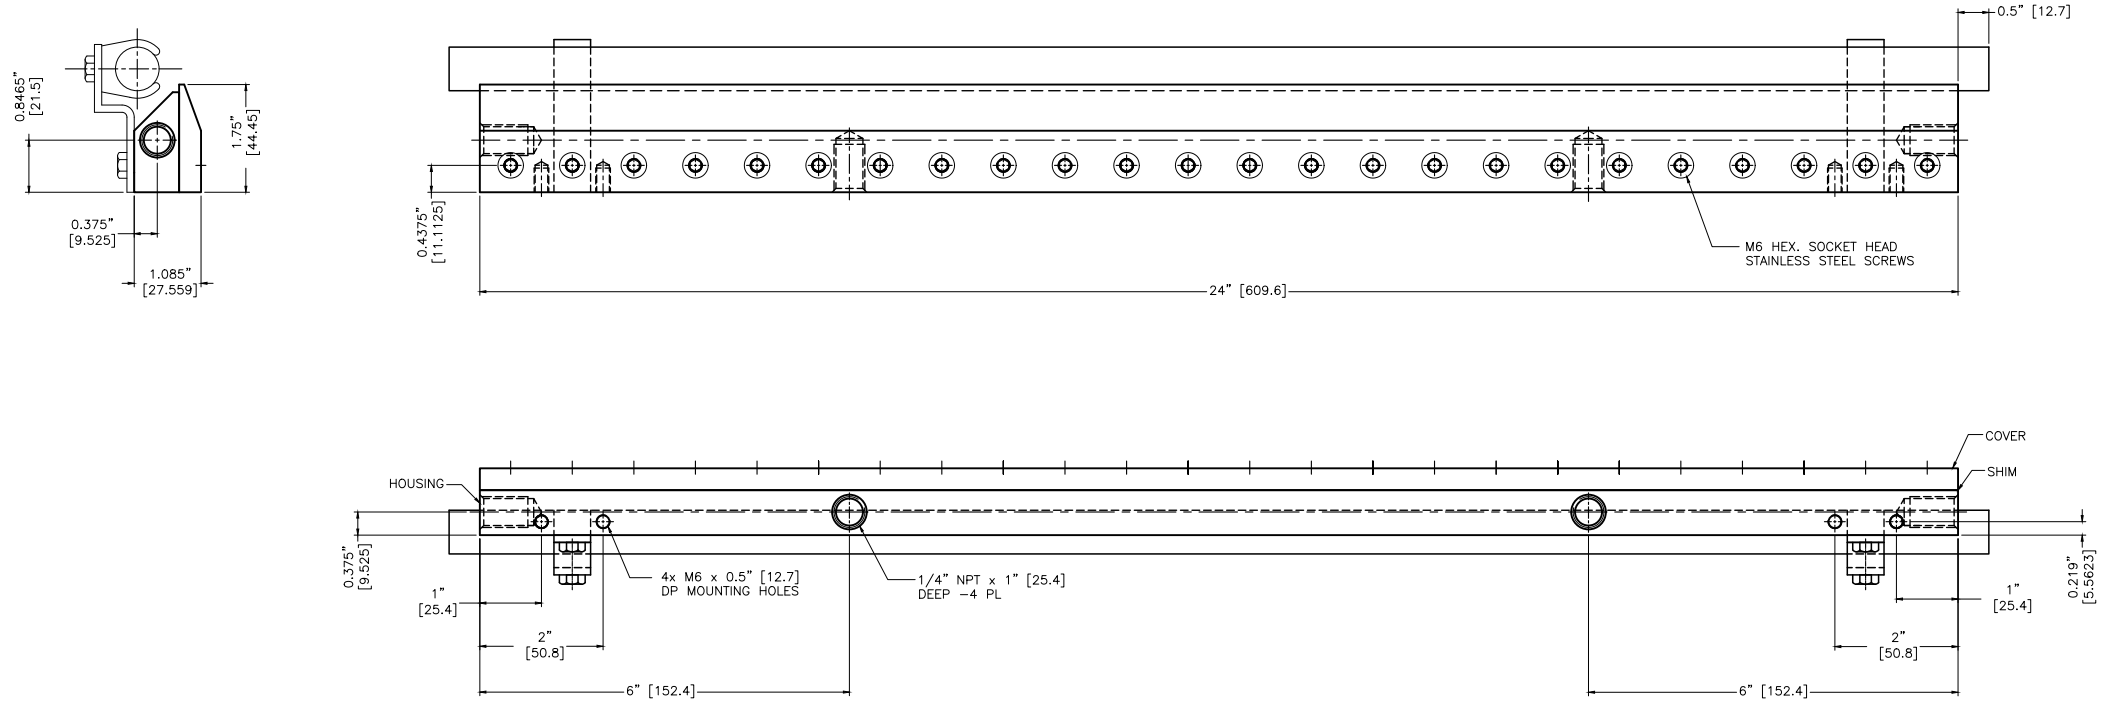

**PROPRIETARY**  
 REPRODUCTION OR DISTRIBUTION  
 WITHOUT WRITTEN CONSENT OF  
 NEXFLOW™ IS PROHIBITED.

THIRD ANGLE PROJECTION		-	-	-	-	REQUIREMENTS—UNLESS OTHERWISE SPECIFIED	CONTRACT NUMBER	NEX FLOW AIR PRODUCTS CORP. 10520 YONGE STREET, UNIT 358-220, RICHMOND HILL, ON L4C 3C7 TEL.: (416) 410-1313 & FAX: (416) 410-1806 www.nex-flow.com					
						GENERAL	CLIENT	-					
MATERIAL	ALUMINIUM					1. DIMS ARE IN INCHES (MM) 2. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5 (1982) 3. MACHINE FINISH 125 MICRO INCH RMS 4. INTERNAL RADI .015 5. BREAK SHARP CORNERS .005 TO .015	CONTRACTOR	-					
FINISH	-					LIMITS	DRAWN	DATE	10/04/2021				
						1. LINEAR DIMS. XX = .005 XX = .010 X = .030 2. ANGLES = ± 1/2" 3. RUNOUT .010 TIR 4. HOLES IN ACCORDANCE WITH AND 10387	CHIRAG.S	CHECKED	LES				
NEXT ASSEMBLY	USED ON	QTY PER ASSY	PART NO				DESIGN	PROJECT	-				
PART NO							PROJECT	Q.A.	-				
							STRESS	MANUFACTURING	SIZE	CAGE CODE	DWG NO	RELEASE	REV
							THERMAL	MATERIALS	-	-	15024X - 16024X	-	-
							MECHANISM	ELECTRICAL	SCALE	1:1	CAD NO	-	SHEET 1 OF 1