


8 7 6 5 4 3 2 1

NOTES:

- 1 ALL DIMENSIONS SHOWN ARE FINISH OPERATIONAL DIMENSIONS WHICH INCLUDE RESIDUAL COATINGS UNLESS OTHERWISE SPECIFIED.
- 2 PART TO BE PACKED PROPERLY TO AVOID ANY DAMAGE WHILE SHIPPING & HANDLING.
- 3 ALL HORIZONTAL DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINE UNLESS OTHERWISE SPECIFIED.

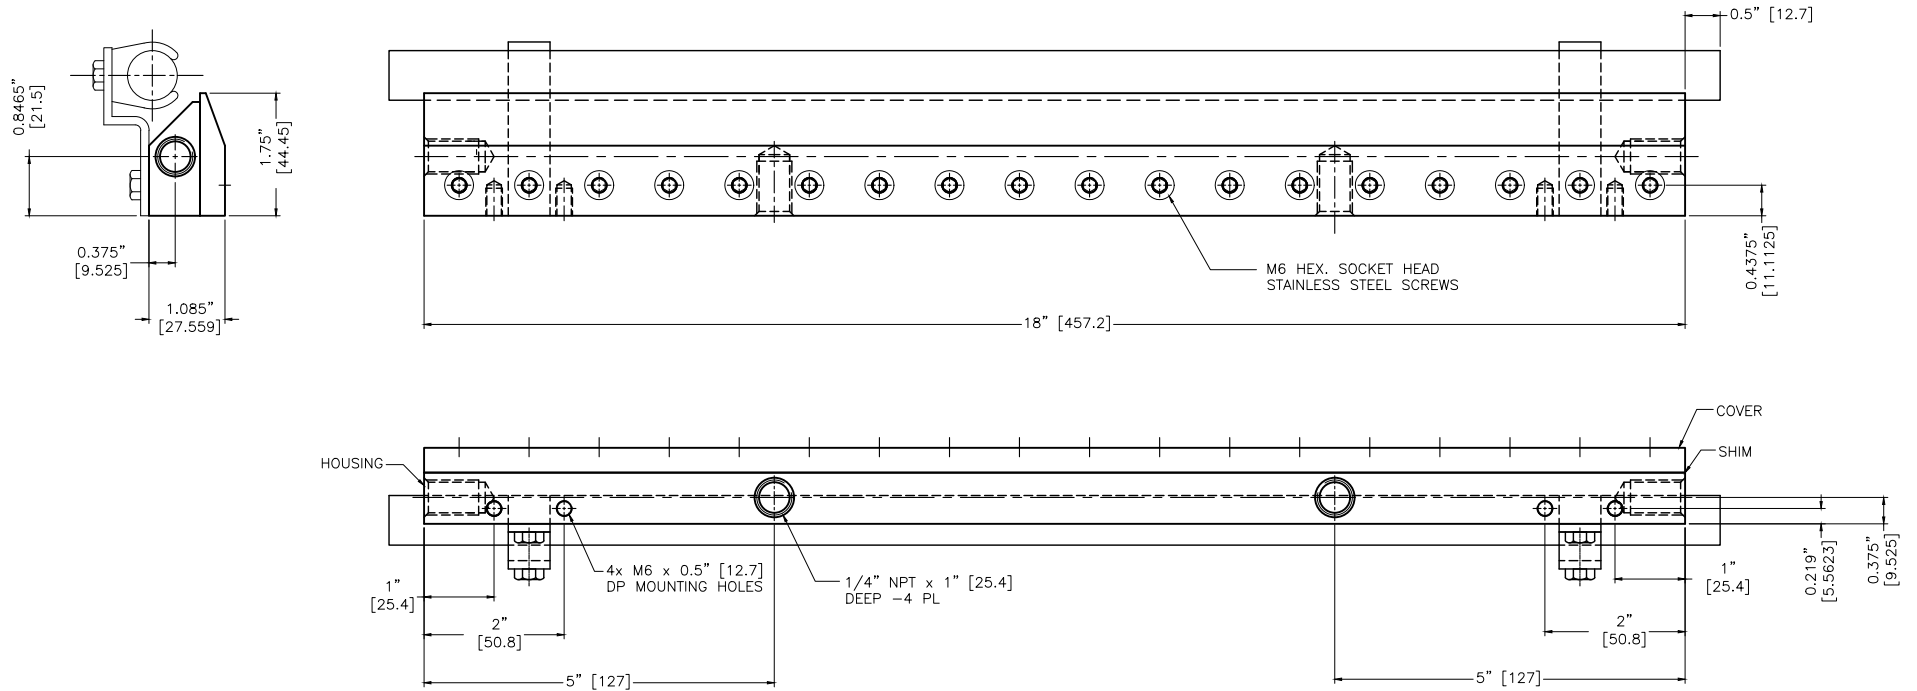

THIRD ANGLE PROJECTION	REQUIREMENTS-UNLESS OTHERWISE SPECIFIED				CONTRACT NUMBER	NEX FLOW AIR PRODUCTS CORP.			
	GENERAL				CLIENT	10520 YONGE STREET, UNIT 358-220, RICHMOND HILL, ON L4C 3C7			
MATERIAL	1. DIMS ARE IN INCHES (MM)				CONTRACTOR	TEL.: (416) 410-1313 & FAX: (416) 410-1806 www.nex-flow.com			
	2. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5 (1982)				DATE	TITLE			
FINISH	3. MACHINE FINISH 125 MICRO INCH RMS				S.PATIL	18" X-STREAM AIR BLADE AIR KNIFE WITH IONIZER			
	4. INTERNAL RADII .015				CHECKED	SIZE			
5. BREAK SHARP CORNERS .005 TO .015 LIMITS				A.SHISH	CAGE CODE				
1. LINEAR DIMS				PROJECT	DWG NO				
.XXX = .005				STRESS	15018X/16018X				
.XX = .010				MANUFACTURING	SCALE				
.X = .030				THERMAL	1:1				
2. ANGLES = ± 1/2"				MATERIALS	CAD NO				
3. RUNOUT .010 THR				MECHANISM	XAKI-18				
4. HOLES IN ACCORDANCE WITH AND 10387				ELECTRICAL	SHEET				
NEXT ASSEMBLY	USED ON	QTY PER ASSY	PART NO	1 OF 1					

8 7 6 5 4 3 2 1